
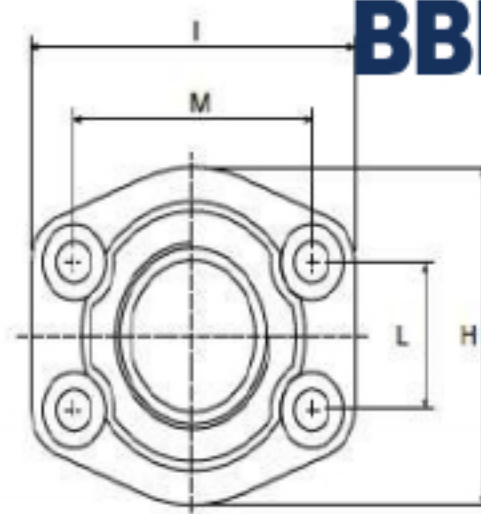


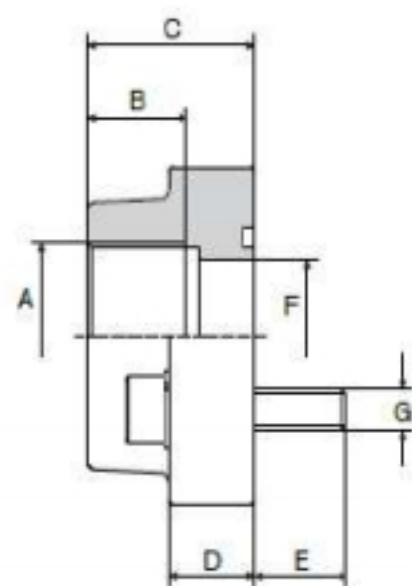

ВВЕРТНЫЕ ФЛАНЦЫ

**ВНУТРЕННЯЯ РЕЗЬБА
BSP С УПЛОТНЕНИЯМИ**

3000 PSI

МАХ. ДАВЛЕНИЕ	TIP	A S.A.E.	B	C	D	E	F	БОЛТЫ G	H	I	ОСЬ L M		УПЛОТНЕНИЕ
350	HPF-BDA-O-301	1/2"	15	36	16	14	14	M8×30	47	57	17,5	38,1	18,54×3,53
350	HPF-BDA-O-302	3/4"	18	36	18	17	19	M10×35	50	66	22,3	47,6	24,99×3,53
315	HPF-BDA-O-303	1"	20	38	18	17	25	M10×35	56	72	26,2	52,4	32,92×3,53
250	HPF-BDA-O-304	1 1/4"	23	41	21	19	32	M10×40	68	80	30,2	58,7	37,69×3,53
200	HPF-BDA-O-305	1 1/2"	25	45	25	20	38	M12×45	78	94	35,7	69,9	47,22×3,53
200	HPF-BDA-O-306	2"	26	45	25	20	50	M12×45	90	102	42,9	77,8	56,74×3,53
180	HPF-BDA-O-307	2 1/2"	30	50	25	20	63	M12×45	101	115	50,8	88,9	69,44×3,53
140	HPF-BDA-O-308	3"	30	50	27	28	73	M16×55	124	135	61,9	106,4	85,32×3,53

6000 PSI

МАХ. ДАВЛЕНИЕ	TIP	A S.A.E.	B	C	D	E	F	БОЛТЫ G	H	I	ОСЬ L M		УПЛОТНЕНИЕ
420	HPF-BDA-O-601	1/2"	15	36	16	14	14	M8×30	47	57	18,2	40,5	18,54×3,53
420	HPF-BDA-O-602	3/4"	18	36	21	14	19	M10×35	55	71	23,8	50,8	24,99×3,53
420	HPF-BDA-O-603	1"	22	42	25	20	25	M12×45	65	81	27,8	57,2	32,92×3,53
420	HPF-BDA-O-604	1 1/4"	23	45	27	23	32	M14×50	77	94	31,8	66,6	37,69×3,53
420	HPF-BDA-O-605	1 1/2"	24	51	30	25	38	M16×55	94	112	36,5	79,3	47,22×3,53
420	HPF-BDA-O-606	2"	33	65	37	33	50	M20×70	116	135	44,5	96,8	56,74×3,53