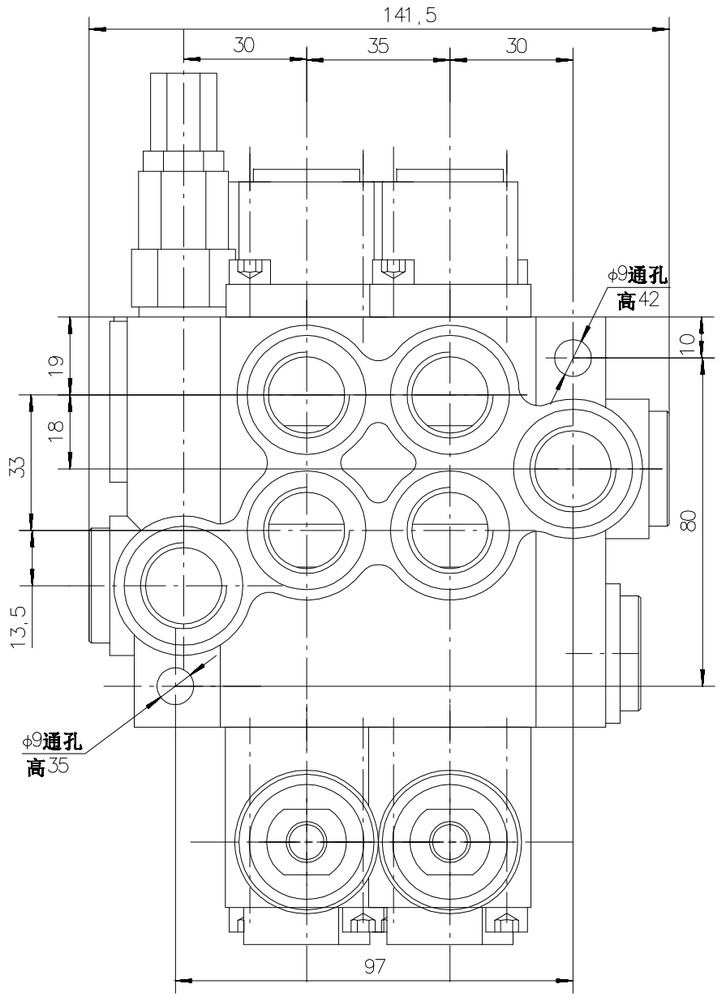


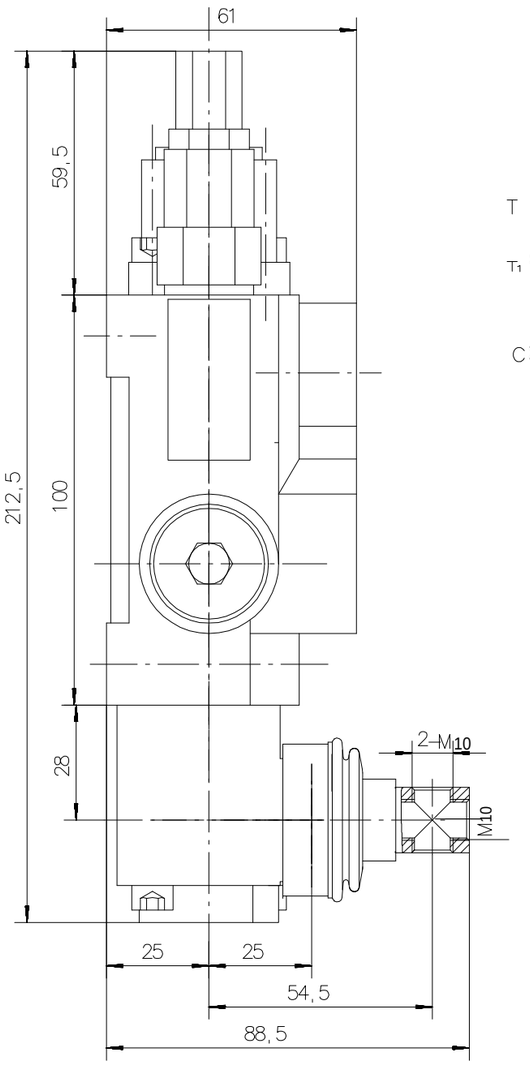


## 液压原理图

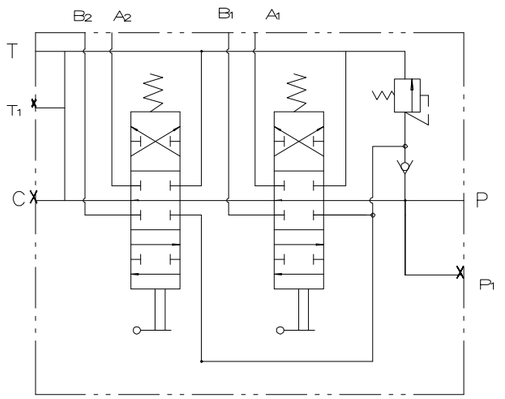


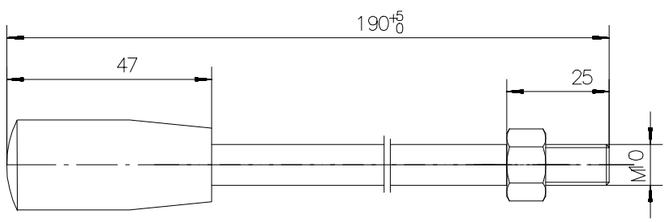


Technical requirements:

1. Rated flow rate: 40L/min, maximum flow rate: 55L/min;
2. Maximum working pressure: 25MPa;
3. Safety valve setting pressure: 20MPa;
4. Each moving part must be flexible and free from any sticking or jamming;
5. Oil port size: P, A, B, T, C oil ports are all G1/2;
   Invert the orifice at an angle of 1X45 °;
6. Each inlet and outlet should be sealed with plastic oil plugs to prevent dust;
7. The form, length, and color of the handle cover are determined according to user requirements.

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | 设 计 | | | 图样标记 | | P40-20T |
| | | | | 制 图 | | | 重 量 | 比 例 | |
| | | | | 描 图 | | | | | |
| | | | | 校 对 | | | 共 张 | 第 张 | 多路阀<br>外型尺寸图 |
| | | | | 工艺检查 | | | | | |
| | | | | 标准化检查 | | | | | |
| 标记 | 更改内容或依据 | 更改人 | 日期 | 审 核 | | | | | |